



345

TRANSFORMER PROTECTION SYSTEM

Intuitive protection and advanced communications for power transformers

KEY BENEFITS

- Proven and secure high-speed protection system for power transformers
- Integrated transformer thermal monitoring for asset management maintenance optimization
- Improved transformer energization inhibiting
- Ground current supervised sensitive ground fault protection for detection of ground faults down to 5% of the winding limiting the transformer damage
- Assignable CT inputs provide flexibility of usage through all timed and instantaneous over-current protections
- Powerful communication capabilities allowing seamless integration into most communication architectures
- Easy access to information via multiple communication networks including USB, Serial, Fiber or copper Ethernet
- Small footprint easy on new installations or retrofits
- Simplified transformer and protection setup right from the main menu Quick Setup feature. Fast and easy menu navigation

APPLICATIONS

- Low and medium voltage two winding power transformers
- Reactors and autotransformers
- Applications requiring fast and secure communications
- Harsh environments requiring protection against corrosion and humidity

FEATURES

Protection and Control

- Dual slope, dual breakpoint characteristic restrained differential
- Second harmonic inrush and fifth harmonic over-excitation inhibits
- Instantaneous differential
- Restricted Ground Fault
- Thermal model
- Neutral Timed and Instantaneous over-current
- Phase and Ground Timed and Instantaneous over-current
- Negative Sequence Timed over-current
- Breaker Failure
- Logic Elements

Enervista™ Software

- Enervista™ Software- an industry-leading suite of software tools that simplifies every aspect of working with Multilin devices.

Metering & Monitoring

- Current Metering
- Event Recorder: 256 events with 1ms time stamping
- Oscillography with 32 samples per cycle and digital states
- IRIG-B clock synchronization
- Security audit trail

User Interface

- 4X20 character LCD display
- Control panel with 12 LED indicators
- Front USB and rear serial, Ethernet and Fiber ports
- Multiple Protocols:
IEC 61850
IEC 61850 GOOSE
MODBUS TCP/IP, MODBUS RTU,
DNP 3.0, IEC60870-5-104, IEC60870-5-103



Digital Energy
Multilin

Overview

The 345 is a microprocessor-based system for primary and backup protection of small and medium size distribution transformers. The 345 offers advanced algorithms for automatic magnitude and phase compensations for more than twenty types of two winding transformers, fast and secure biased differential protection with dual slope, and dual breakpoint characteristic. The 345 is equipped with restricted ground fault elements to detect ground faults down to 5% of the transformer winding, basic thermal protection and a full set of phase, ground, neutral and negative sequence over-current protection. The two identical groups with protection elements aim to satisfy these applications, where an automatic change of the settings is required.

The 345 provides excellent accessibility and transparency with regard to the

power system conditions and events, through its target messaging and the four lines of 20 characters display, the Transient and Event Recorders, and the powerful EnerVista PC program.

Easy to Use

Drawout Construction

The 345 offers a complete drawout feature eliminating the need for rewiring after testing has been concluded. The withdrawable feature also eradicates the need to disconnect communication cables, and helps retain communication status even after the relay has been withdrawn from its case.

Effortless Retrofit

The compact and withdrawable feature of the 345 relay minimizes mounting requirements, enables easy retrofit to existing cases, and allows multiple relays to be mounted side by side on a panel.

The 345 also provides a pluggable RS485 & IRIG-B connection for easy trouble shooting.

Easy to Configure

Fast & Simple Configuration

Providing ease-of-use functionality, the 345 allows for transformer configuration in a simple one page setup screen. Therefore complete transformer protection setup can be completed in one easy step.

Advanced Communications

Easy integration into new or existing infrastructure

With several Ethernet and serial port options, and a variety of communication protocols, the 345 provides advanced and flexible communication selections for new and existing applications.


345 Relay Features



Easy to Configure - 1 simple step



Easy to Use - Draw out case



Advanced & Flexible Communication Options



Diagnostic Alarms



Enhanced Diagnostics

Preventative Maintenance

The 345 allows users to track relay exposure to extreme environmental conditions by monitoring and alarming at high or low temperatures. This data allows users to proactively schedule regular maintenance work and upgrade activities.

Failure Alarm

The 345 detects and alarms on communication port and IRIG-B failures. The 345 also enables users to analyze system performance via diagnostics information such as event records and oscillography. It issues detailed transformer health reports and alarms when thresholds are exceeded.

Cost Effective

Robust Design

The 345 is subjected to Accelerated Life Testing (ALT) to validate accurate relay functions under specified normal conditions. The device is further tested for durability through High Accelerated Life Testing (HALT), undergoing stress testing for extreme operating conditions.

Reduced Life Cycle Cost

The 345 is designed to reduce total installation and life cycle cost for transformer protection. The draw out construction of the device reduces downtime during maintenance and

decreases extra wiring needed for relay testing and commissioning.

Multiple Options

Several options for protection and communications are provided to match basic to high end application requirements.

Protection & Control

The 345 transformer protection system is designed to protect and control small to medium size power transformers. Flexible and powerful, the 345 provides advanced transformer protection, control and monitoring in one economical draw-out design. The 345 contains a full range of self-contained protection and control elements as detailed in the Functional Block Diagram and in the Features table.

Percent Differential Protection

The Percent Differential protection is based on a proven algorithm that provides good sensitivity on detecting internal faults and better stability during through-fault conditions. The protection is characterized with the following key elements:

- configurable dual slope, dual breakpoint differential/restraint characteristic
- Inrush inhibiting
- Overexcitation inhibits

Dual Slope, Dual Breakpoint Differential / Restraint Characteristic

This characteristic defines the area of percent differential protection operation versus no-operation, constructed through


the setting of the minimum pickup differential current, the settings of slope 1 and slope 2 connected by a cubic spline curve, as well as the settings of breakpoint 1 and breakpoint 2. The maximum winding current is used as a restraining signal for better through-fault stability under CT saturation conditions.

Inrush Inhibit

The 2nd harmonic inrush inhibit function is selectable in order to cover energization of different types of transformers, and can be set to either per-phase, 2-out-of-3, or average mode.


Overexcitation inhibit

An increase in transformer voltage, or decrease in system frequency may result in transformer overexcitation condition. In some cases the transformer overexcitation may result in undesirable operation of the percent differential element. Fifth harmonic inhibiting is integrated into the

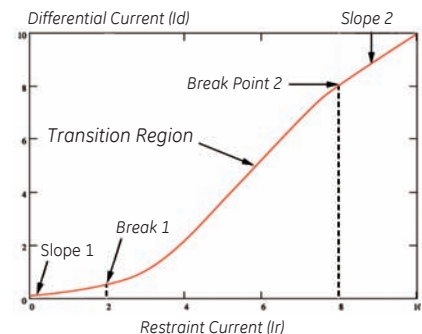

The settings for the dual-slope, dual-breakpoint characteristic provides higher flexibility for shaping up the characteristic and achieve better sensitivity and security.

Functional Block Diagram

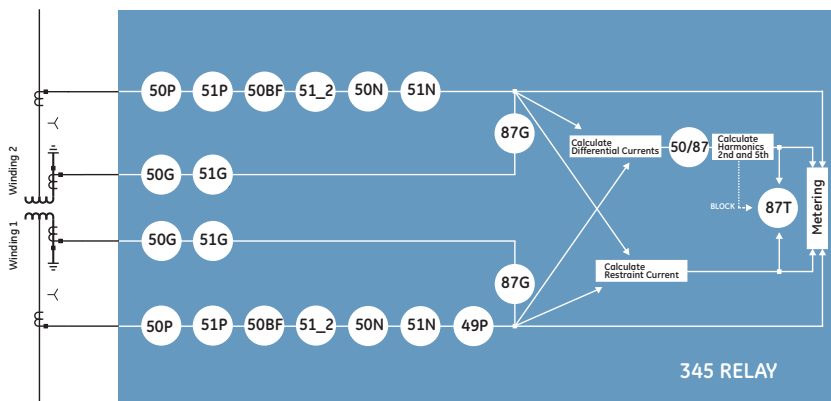

ANSI Device Numbers & Functions

| Device Number | Function |
|---------------|---|
| 49 | Thermal Model |
| 50/87 | Instantaneous Differential |
| 50G | Ground/Instantaneous Overcurrent |
| 50N | Neutral Instantaneous Overcurrent |
| 50P | Phase Instantaneous Overcurrent |
| 50BF | Breaker Failure |
| 51_2 | Negative Sequence Timed Overcurrent |
| 51G | Ground/Sensitive Ground Timed Overcurrent |
| 51N | Neutral Timed Overcurrent |
| 51P | Phase Timed Overcurrent |
| 87G | Restricted Ground Fault |
| 87T | Percent Differential |

percent differential element to cater such overexcitation conditions.

Unrestrained differential

An unrestrained differential element is provided for fast tripping on heavy internal faults to limit further damage to the transformer and minimize the risk to the rest of the system.

Restricted Ground Fault (RGF)

The Restricted Ground Fault (RGF) elements extend the protection coverage to the neutral point of wye-connected windings where fault currents may be below the pickup of the main transformer differential element. The RGF elements use maximum phase winding currents as a restraining signal to provide stability during through fault conditions. Configurable ground current supervision is integrated into the element to add more stability during non-ground out of zone faults with CT saturation, resulting in excessive neutral current, that may be enough to cause RGF operation.

Thermal protection

The 345 relay provides basic thermal protection based on winding heating and cooling constants. The protection monitors the winding loading, and is settable to produce alarm or trip, based on the selected overloading criteria.


Overcurrent Elements

The 345 relay provides phase, neutral, ground and negative sequence overcurrent functions that are configurable with respect to either winding currents. They can run in parallel with the main differential protection, and can be set to provide either primary or backup transformer protection for all types of transformer faults.

When ordered with sensitive ground CTs, the 345 relay can be set to provide 10 times more sensitivity on detection of ground fault currents through the transformer winding neutrals grounded via current limiting resistor.

Inputs/Outputs

The 345 features the following inputs and outputs for monitoring and control of typical transformer applications:

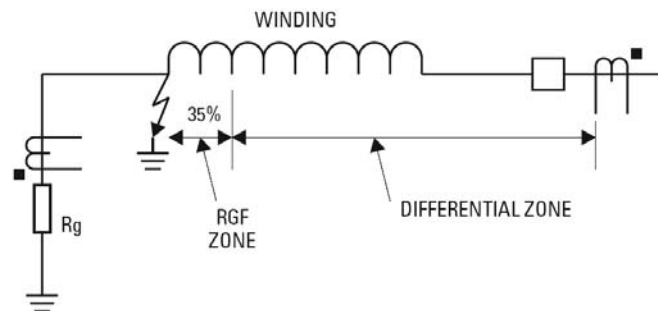

Faults close to the neutral point of a wye-connected winding do not generate adequate fault current for differential element to pick up. Restricted Ground Fault protection provides sensitive ground fault detection for low-magnitude fault currents.

- 10 contact Inputs with programmable thresholds
- 2 Form A output relays for breaker trip with coil monitoring
- 5 Form C output relays

Advanced Automation

Logic Elements

The 345 relay has sixteen Logic Elements available for the user to build simple logic using the state of any programmed contact, virtual, or remote input, or an output operand from protection, or control elements.

The logic provides for assigning up to three triggering inputs in an "AND/OR" gate for the logic element operation and up to three blocking inputs in an "AND/OR" gate for defining the block signal. Pickup and dropout timers are available for delaying the logic element operation and reset respectively.

Virtual Inputs

Virtual inputs allow communication devices the ability to write digital commands to the 345 relay. These commands could be changing setting groups or blocking protection elements.

IEC61850

The 345 supports IEC 61850 Logical Nodes which allows for digital communications to DCS, SCADA and higher level control systems.

In addition, the 345 also supports IEC 61850 GOOSE communication, providing a means of sharing digital point state information between 345's or other IEC61850 compliant IED's.

- Eliminates the need for hardwiring contact inputs to contact outputs via communication messaging.
- Transmits information from one relay to the next in as fast as 8 ms.
- Enables sequence coordination with upstream and downstream devices.
- When Breaker Open operation malfunctions, GOOSE messaging sends a signal to the upstream breaker to trip and clear the fault.

Monitoring & Diagnostics

Event Recording

Events consist of a broad range of change of state occurrences, including pickups, trips, contact operations, alarms and self test status. The 345 stores up to 256 events time tagged to the nearest millisecond. This provides the information required to determine sequence of events which facilitates diagnosis of relay operation. Each event is individually maskable in order to avoid the generation of undesired events, and includes the values of currents and status of all the protection elements at the moment of the event.

Oscillography

The 345 captures current waveforms and digital channels at 32 samples per cycle. The oscillography record captures

8 individual analog channels allowing for detailed analysis. The oscillography is triggered either by internal signals or an external contact.

IRIG-B

IRIG-B is a standard time code format that allows time stamping of events to be synchronized among connected devices within 1 milliseconds. An IRIG-B input is provided in the 345 to allow time synchronization using a GPS clock over a wide area. The 345 IRIG-B supports both AM and DC time synchronization with an auto detect feature that removes the requirement for manual selection.

Metering

The 345 continuously measures and computes the following AC signals indicating the health of the protected transformer:

- Phase winding currents
- Winding ground current
- Winding neutral current
- Winding negative sequence current
- Differential and restraint currents per-phase
- Winding ground differential current
- Percent 2nd and 5th harmonics differential currents per phase
- Percent thermal capacity per-phase

The states of all digital inputs/outputs are provided through the actual values either from the summary pages or individually. This includes:

- States of contact inputs
- States of virtual inputs
- States of remote inputs
- States of relay outputs
- States of logic elements

Security

Security Audit Trail

The Security Audit Trail feature provides complete traceability of relay setting changes at any given time and is NERC CIP compliant. The 345 maintains a history of the last changes made to the 345 configuration, including modifications to settings and firmware upgrades. Security Setting Reports include the following information:

- If Password was required to change settings
- MAC address of user making setting changes
- Listing of modified changes
- Method of setting changes - Keypad, Front serial port, Ethernet, etc.


Password Control

With the implementation of the Password Security feature in the 345 relay, extra measures have been taken to ensure unauthorized changes are not made to the relay. When password security is enabled, changing of setpoints or issuing of commands will require passwords to be entered. Separate passwords are supported for remote and local operators, and separate access levels support changing of setpoints or sending commands.

Advanced Communications

The 345 utilizes the most advanced communication technologies today making it the easiest and most flexible transformer protection relay to use and integrate into new and existing infrastructures. Multiple communication ports and protocols allow control and easy access to information from the 345.

The 345 supports the most popular industry standard protocols enabling easy, direct integration into electrical SCADA and HMI systems. Modbus RTU is provided as standard with a RS485 networking port. The following optional protocols are available:

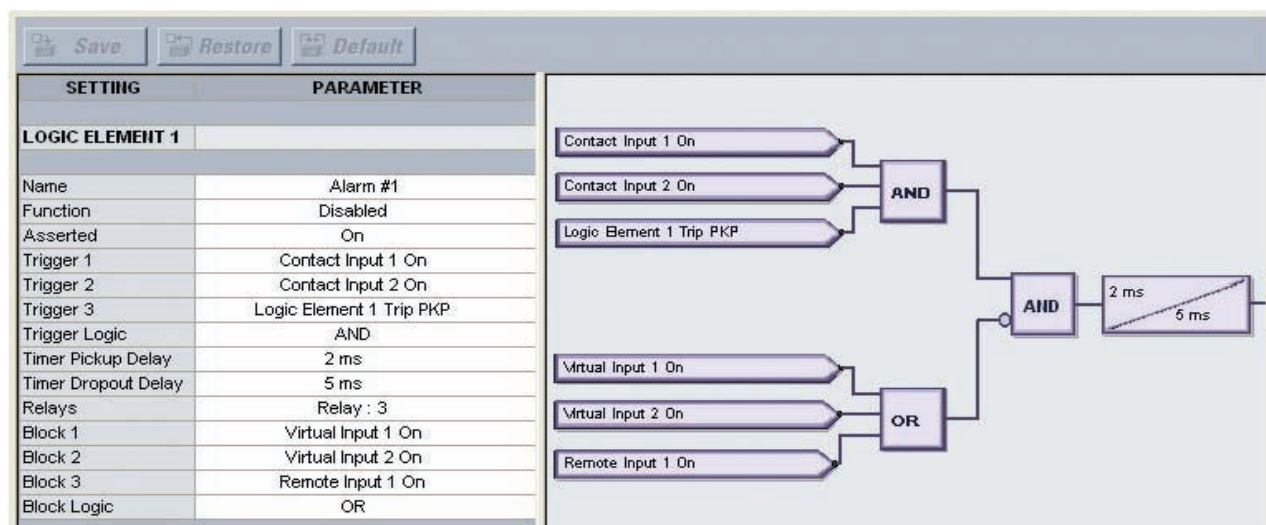

Eight logic elements available for simple logic for applications such as manual control, interlocking, and peer to peer tripping.

- IEC 61850
- IEC 61850 GOOSE
- DNP 3.0,
- Modbus RTU,
- Modbus TCP/IP,
- IEC 60870-5-104,
- IEC 60870-5-103

Easy to Use

Simplified Transformer Setting

Included with every 345 Transformer Protection System is the Multilin Simplified Transformer Setup. The Simplified Transformer Setup provides users with a quick and easy method to setup and start the transformer and process in applications that require fast commissioning.

The Simplified Transformer Setup will generate a complete 345 setting file based on the transformer nameplate and system information entered by the user. Once all the information is entered, the Simplified Transformer Setup will generate the settings file, as well as provide the documentation indicating which settings were enabled, along with an explanation of the specific parameters entered. The Simplified Transformer Setup will provide a detailed setting file in PDF format that can be saved or printed for future reference.

Enervista™ Software

The Enervista suite is an industry leading set of software programs that simplifies every aspect of using the 345 relay. The Enervista suite provides all the tools to monitor the status of the protected asset, maintain the relay, and integrate the information measured into DCS or SCADA monitoring systems. Convenient COMTRADE and sequence of event viewers are an integral part of the 345 set up software and are included to ensure proper protection and system operation.

Launchpad

Enervista Launchpad is a powerful software package that provides users with all of the set up and support tools needed for configuring and maintaining GE products. The setup software within Launchpad allows configuring devices in real time by communicating using serial, Ethernet or modem connections, or offline by creating setting files to be sent to devices at a later time.

Included in Launchpad is a document archiving and management system that ensures critical documentation is up-to-date and available when needed. Documents made available include:

- Manuals
- Application Notes
- Guideform Specifications
- Brochures
- Wiring Diagrams
- FAQs
- Service Bulletins

Viewpoint Monitoring

Viewpoint Monitoring is a simple to use and full featured monitoring and data recording software package for small systems. Viewpoint monitoring provides a complete HMI package with the following functionality:

- Plug and play device monitoring
- System single line monitoring and control
- Annunciator alarm screens
- Trending reports
- Automatic event retrieval
- Automatic waveform retrieval

Viewpoint Maintenance

Viewpoint Maintenance provides tools that will increase the security of the 345 Transformer Protection System. Viewpoint Maintenance will create reports on the operating status of the relay, and simplify the steps to troubleshoot protected transformers.

SECURITY/CHANGE HISTORY REPORT

Generated at: September 15 2010 16:56:05

Device Summary

| | |
|-------------------|--------------------|
| Device Name: | 345 |
| Device Type: | SR 345 |
| Order Code: | 345-EP55SHSMNN2EDN |
| Firmware Version: | 1.30 |
| Serial Number: | BLOA09000565 |
| Communication: | COM 3, 115200 |

Setting Changes History

| Session# | Date Of Change | Method Of Change | # Of Changes | Password Entered | Changes by Whom IP /Mac | Event Type | Filename | Status | Firm. Version |
|----------|------------------------|------------------|--------------|------------------|-------------------------|-----------------|----------------|-------------|---------------|
| 1 | 09/15/2010 06:23:20 PM | USB | 0 | Yes | 0:0:0:0 | Setpoint File | | Relay Ready | 130 |
| 2 | 09/15/2010 06:24:52 PM | USB | 14 | Yes | 3:13:81:141 | Setpoint Change | 345_130.ar3 C: | Relay Ready | 130 |

Setting Changes Detail History

| Session# | Date Of Change | Old Value | New Value | Data Item | Modbus Address |
|----------|------------------------|-----------|-----------|--------------------------------|----------------|
| 2 | 09/15/2010 06:24:52 PM | 50 | 5 | W1 Sensitive Ground CT Primary | 0Xc49 |
| 2 | 09/15/2010 06:24:52 PM | 50 | 5 | W2 Sensitive Ground CT Primary | 0Xc4a |
| 2 | 09/15/2010 06:24:52 PM | 5 | 5000 | W1 Phase CT Primary | 0Xc4b |
| 2 | 09/15/2010 06:24:52 PM | 5 | 5000 | W2 Phase CT Primary | 0Xc4d |
| 2 | 09/15/2010 06:24:58 PM | 0 | 1 | Supply Frequency | 0X11b |
| 2 | 09/15/2010 06:25:13 PM | 0 | 1 | Phase Compensation | 0X58e |
| 2 | 09/15/2010 06:25:18 PM | 0 | 1 | Winding 2 Grounding | 0X594 |
| 2 | 09/15/2010 06:29:39 PM | 0 | 69 | Breaker Connected | 0X56b |
| 2 | 09/15/2010 06:29:39 PM | 0 | 64 | Breaker 52a Contact | 0X56c |
| 2 | 09/15/2010 06:29:39 PM | 0 | 65 | Breaker 52b Contact | 0X56d |
| 2 | 09/15/2010 06:29:49 PM | 0 | 70 | Breaker 2 Connected | 0X585 |

GE Multilin

EnerVista VIEWPOINT maintenance



EnerVista VIEWPOINT maintenance

Trace any setting changes with security audit trail

The tools available in Viewpoint Maintenance include:

- Settings Security Audit Trail
- Device Health Report
- Comprehensive Fault Diagnostics


EnerVista Integrator

EnerVista Integrator is a toolkit that allows seamless integration of Multilin devices into new or existing automation systems. Included in the EnerVista Integrator is:

- OPC/DDE Server
- Multilin Devices
- Automatic Event Retrieval
- Automatic Waveform Retrieval

Power System Troubleshooting

Analyze power system disturbances with transient fault recorder and event records

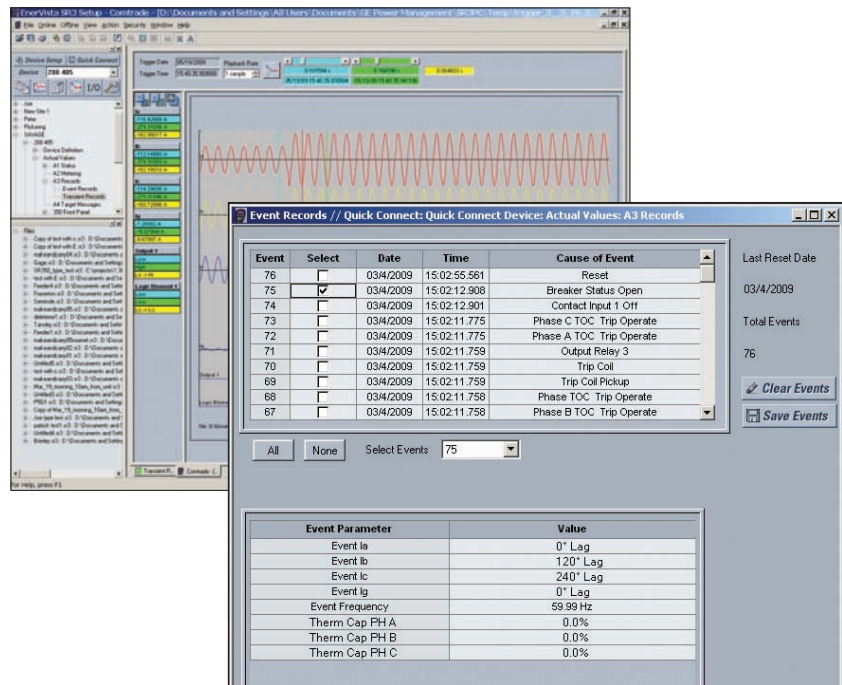

User Interface



IN SERVICE: This indicator will be on continuously lit if the relay is functioning normally and no major self-test errors have been detected.

TROUBLE: Trouble indicator LED will be AMBER if there is a problem with the relay or the relay is not configured.

TRIP: Indicates that the relay has tripped the transformer offline based on predefined programmed conditions.

ALARM: Indicates that the transformer is currently operating in an alarm condition and may proceed to a trip condition if not addressed.


MAINTENANCE: Environmental alarms such as ambient temperature alarm or coil monitor alarms.

The display messages are organized into Main Menus, Pages, and Sub-pages.

There are four main menus labeled Actual Values, Quick Setup, Setpoints, and Maintenance. Pressing the MENU key followed by the MESSAGE key scrolls through the four Main Menu Headers.

The ten button keypad allows users easy access to relay configuration and information.

Dimensions

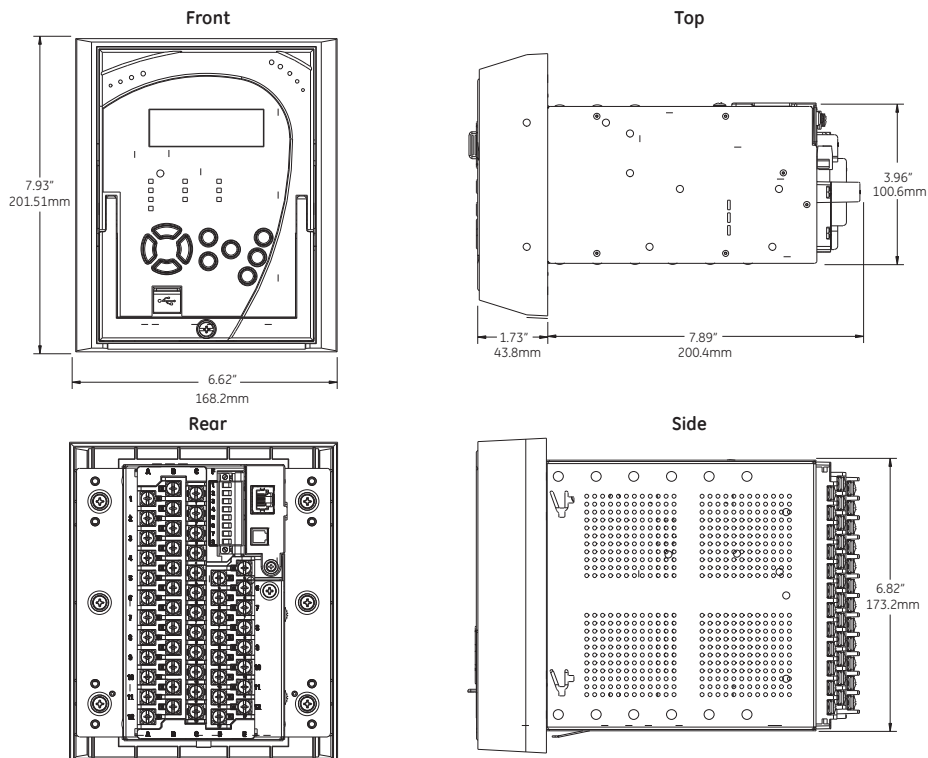

Technical Specifications

PASSWORD SECURITY

Master Reset Password: 8 to 10 alpha-numeric characters
Settings Password: 3 to 10 alpha-numeric characters for local or remote access
Control Password: 3 to 10 alpha-numeric characters for local or remote access

PHASE/NEUTRAL/GROUND/NEGATIVE SEQUENCE TIMED OVERCURRENT (51P/51N/51G/51_2)

Ground Current: Fundamental
Pickup Level: 0.04 to 20.00 x CT in steps of 0.01 x CT
Dropout Level: 97 to 99% of Pickup @ $I > 1 \times CT$
 pickup - 0.02 x CT @ $I > 1 \times CT$
Curve Shape: ANSI Extremely/Very/Moderately/ Normally Inverse
 Definite Time (1 s base curve)
 IEC Curve A/B/C/Short
 0.05 to 20.00 in steps of 0.01
Curve Multiplier: 0.05 to 20.00 in steps of 0.01
Reset Time: Instantaneous, Linear
Time Delay: $\pm 3\%$ of expected inverse time or 1 cycle, whichever is greater
Accuracy: per CT input
Level Accuracy: per CT input

SENSITIVE GROUND TIMED OVERCURRENT (51SG)

Ground Current: Fundamental
Pickup Level: 0.005 to 3.000 x CT in steps of 0.001 x CT
Dropout Level: 97 to 99% of Pickup @ $I > 0.1 \times CT$
 pickup - 0.02 x CT @ $I > 0.1 \times CT$
Curve Shape: ANSI Extremely/Very/Moderately/ Normally Inverse
 Definite Time (1 s base curve)
 IEC Curve A/B/C/Short
 0.5 to 20.0 in steps of 0.1
Curve Multiplier: 0.5 to 20.0 in steps of 0.1
Reset Time: Instantaneous, Linear
Time Delay: $\pm 3\%$ of expected inverse time or 1 cycle, whichever is greater
Accuracy: per CT input
Level Accuracy: per CT input

PHASE/NEUTRAL/GROUND/NEGATIVE SEQUENCE INSTANTANEOUS OVERCURRENT (50P/50N/50G/50_2)

Current: Fundamental
Pickup Level: 0.05 to 20.00 x CT in steps of 0.01 x CT
Dropout Level: 97 to 99% of Pickup @ $I > 0.1 \times CT$
 pickup - 0.02 x CT @ $I < 0.1 \times CT$
Time delay: 0.00 to 300.00 sec in steps of 0.01
Operate Time: <30 ms @ 60Hz ($I > 2.0 \times PKP$, No time delay)
 <35 ms @ 50Hz ($I > 2.0 \times PKP$, No time delay)
 0 to 1 cycle (time delay selected)
Time Delay Accuracy: per CT input
Level Accuracy: per CT input

TRANSFORMER PERCENT DIFFERENTIAL PROTECTION (87T)

Differential/Restraint Characteristic: Dual Slope, Dual Breakpoint
Minimum Pickup Level: 0.05 to 1.00 x CT in steps of 0.01
Slope 1 Range: 15 to 100% in steps of 1%
Slope 2 Range: 50 to 100% in steps of 1%
Kneepoint 1: 0.50 to 4.00 x CT in steps of 0.01
Kneepoint 2: 1.00 to 10.00 x CT in steps of 0.01
2nd Harmonic Inhibit Level: 1.0 to 40.0% in steps of 0.1%
2nd Harmonic Inhibit Mode: Per-phase, 2-out-of-three, Average
5th Harmonic Inhibit Level: 1.0 to 40.0% in steps of 0.1%
Dropout Level: 97 to 98% of Pickup
Operate Time: < 20 ms (no harmonics inhibits selected)
 < 30 ms (harmonics inhibits selected)
Level Accuracy: per current inputs

TRANSFORMER THERMAL PROTECTION (49)

Current: Fundamental
Pickup Accuracy: per current inputs
Timing Accuracy: $\pm 3\%$ of expected time, or 30 ms (whichever is greater) @ $I > 1.5 \times PKP$

SENSITIVE GROUND INSTANTANEOUS OVERCURRENT (50SG)

Pickup Level (Gnd IOC): 0.005 to 3.000 x CT in steps of 0.001 x CT
Dropout Level: 97 to 99% of Pickup @ $I > 0.1 \times CT$
 pickup - 0.002 x CT @ $I < 0.1 \times CT$
Time delay: 0.00 to 300.00 sec in steps of 0.01
Operate Time: <30 ms @ 60Hz ($I > 2.0 \times PKP$, No time delay)
 <35 ms @ 50Hz ($I > 2.0 \times PKP$, No time delay)
 0 to 1 cycle (time delay selected)
Time Delay Accuracy: per CT input
Level Accuracy: per CT input

TRANSFORMER INSTANTANEOUS DIFFERENTIAL PROTECTION (50/87)

Pickup Level: 3.00 to 20.00 x CT in steps of 0.01 x CT
Dropout Level: 97 to 98% of Pickup
Operate Time: <30 ms
Level Accuracy: per current inputs

RESTRICTED GROUND FAULT

Number of Elements: 2
Pickup Level: 0.02 to 20.00 x CT in steps of 0.01
 0.002 to 2.000 x CT (with sensitive CTs)
GND Supervision Level: 0.02 to 20.00 x CT in steps of 0.01
 0.002 to 2.000 x CT (with sensitive CTs)
Dropout Level: 97 to 98% of Pickup
Slope Range: 0 to 100% in steps of 1
Pickup Delay: 0.00 to 600.0 s in steps of 0.01
Operate Time: < 30 ms @ 0 ms time delay
Level Accuracy: per current inputs

Technical Specifications (Continued)

PHASE & GROUND CURRENT INPUTS

| | |
|---------------------------|---|
| CT Primary: | 1 to 6000 A |
| Range: | 0.02 to 20 × CT |
| Input type: | 1 A or 5 A (must be specified with order P1G1 or P5G5) Configurable 1 A or 5 A (must be specified with order P0G0) |
| Nominal frequency: | 50/60 Hz |
| Burden: | <0.1 VA at rated load |
| Accuracy: | ±1% of reading at 1 × CT ±3% of reading from 0.1 to 20 × CT ±20% of reading from 0.02 to 0.09 × CT |
| CT withstand: | 1 second at 100 × rated current 2 seconds at 40 × rated current continuous at 3 × rated current |

SENSITIVE GROUND CURRENT INPUT

| | |
|---------------------------|--|
| CT Primary: | 1 to 600 A |
| Range: | 0.002 to 3 × CT |
| Input type: | 1 A or 5 A (must be specified with order P1S1 or P5S5) |
| Nominal frequency: | 50/60 Hz |
| Accuracy: | ±1% of reading at 1 × CT ±3% of reading from 0.01 to 3 × CT ±20% of reading from 0.002 to 0.009 × CT |
| CT withstand: | 1 second at 100 × rated current 2 seconds at 40 × rated current continuous at 3 × rated current |

TRANSIENT RECORDER

| | |
|-------------------------|--|
| Buffer size: | 3 s |
| No. of buffers: | 1×192, 3×64, 6×32 |
| No. of channels: | 14 |
| Sampling rate: | 32 samples per cycle |
| Triggers: | Manual Command Contact Input Virtual Input Logic Element Element Pickup/Trip/Dropout/Alarm |
| Data: | AC input channels Contact input state Contact output state Virtual input state Logic element state |
| Data storage: | RAM - battery backed-up; retained for 3 days |

EVENT RECORDER

| | |
|--------------------------|--|
| Number of events: | 256 |
| Header: | relay name, order code, firmware revision |
| Content: | event number, date of event, cause of event, per-phase current, ground current, sensitive ground current, neutral current, ground differential current, negative sequence current, restraint current, per-phase differential current, per-phase differential second harmonic current, thermal capacity |
| Data Storage: | RAM - battery backed up; retained for 3 days |

CLOCK

| | |
|----------------|--|
| Setup: | Date and time (Daylight Savings Time) |
| IRIG-B: | Auto-detect (DC shift or Amplitude Modulated) Amplitude modulated: 1 to 10 V pk-pk DC shift: 1 to 10 V DC Input impedance: 40 kΩ ± 10% RTC Accuracy: ± 1 min / month at 25°C |

LOGIC ELEMENTS

| | |
|---|---------------------------------------|
| Number of logic elements: | 16 |
| Trigger source inputs per element: | 3 |
| Block inputs per element: | 3 |
| Supported operations: | AND, OR, NOT, Pickup / Dropout timers |
| Pickup timer: | 0 to 6000 ms in steps of 1 ms |
| Dropout timer: | 0 to 6000 ms in steps of 1 ms |

BREAKER FAILURE

| | |
|------------------------|-------------------------------------|
| Pickup Level: | 0.05 to 20.00 × CT in steps of 0.01 |
| Dropout Level: | 97 to 98% of pickup |
| Timer 1 Delay: | 0.03 to 1.00 s in steps of 0.01 s |
| Timer 2 Delay: | 0.00 to 1.00 s in steps of 0.01 s |
| Time Delay: | 0 to 1 cycle (Timer 1, Timer 2) |
| Accuracy: | |
| Level Accuracy: | per CT input |

AMBIENT TEMPERATURE

| | |
|-------------------------|----------------------------------|
| High Temperature | 20°C to 80°C in steps of 1°C |
| Pickup: | |
| Low Temperature | -40°C to 20°C in steps of 1°C |
| Pickup: | |
| Time Delay: | 1 to 60 min in steps of 1 min |
| Temperature | Configurable 90 to 98% of pickup |
| Dropout: | |
| Temperature | ±10°C |
| Accuracy: | |
| Timing Accuracy: | ±1 second |

CONTACT INPUTS

| | |
|---------------------------------|--|
| Inputs: | 10 |
| Selectable thresholds: | 17, 33, 84, 166 VDC |
| Recognition time: | 1/2 cycle |
| Continuous current draw: | 2 mA (to be confirmed) |
| Debounce time: | 1 to 64 ms, selectable, in steps of 1 ms |
| Type: | opto-isolated inputs |
| External switch: | wet contact |
| Maximum input voltage: | 300 VDC |

FORM-A RELAYS

| | |
|---|---|
| Configuration: | 2 (two) electromechanical |
| Contact material: | silver-alloy |
| Operate time: | <8 ms |
| Continuous current: | 10 A |
| Make and carry for 0.2s: | 30 A per ANSI C37.90 |
| Break (DC inductive, L/R=40 ms): | 24 V / 1 A 48 V / 0.5 A 125 V / 0.3 A 250 V / 0.2 A |
| Break (DC resistive): | 24 V / 10 A 48 V / 6 A 125 V / 0.5 A 250 V / 0.3 A 720 VA @ 250 VAC Pilot duty A300 |
| Break (AC inductive): | |
| Break (AC resistive): | 277 VAC / 10 A |

FORM-A VOLTAGE MONITOR

| | |
|----------------------------|---------------|
| Applicable voltage: | 20 to 250 VDC |
| Trickle current: | 1 to 2.5 mA |

FORM-C RELAYS

| | |
|---|---|
| Configuration: | 5 (five) electromechanical |
| Contact material: | silver-alloy |
| Operate time: | <8 ms |
| Continuous current: | 10 A |
| Make and carry for 0.2s: | 30 A per ANSI C37.90 |
| Break (DC inductive, L/R=40 ms): | 24 V / 1 A 48 V / 0.5 A 125 V / 0.3 A 250 V / 0.2 A |
| Break (DC resistive): | 24 V / 10 A 48 V / 6 A 125 V / 0.5 A 250 V / 0.3 A 720 VA @ 250 VAC Pilot duty A300 |
| Break (AC inductive): | |
| Break (AC resistive): | 277 VAC / 10 A |

TRIP SEAL-IN

| | |
|------------------------------|---------------------------------|
| Relay 1 trip seal-in: | 0.00 to 9.99 s in steps of 0.01 |
| Relay 2 trip seal-in: | 0.00 to 9.99 s in steps of 0.01 |

HIGH-RANGE POWER SUPPLY

| | |
|---------------------------|---|
| Nominal: | 120 to 240 VAC 125 to 250 VDC |
| Range: | 60 to 300 VAC (50 and 60 Hz) 84 to 250 VDC |
| Ride-through time: | 35 ms |

LOW-RANGE POWER SUPPLY

| | |
|-----------------|--------------|
| Nominal: | 24 to 48 VDC |
| Range: | 20 to 60 VDC |

ALL POWER SUPPLY RANGES

| | |
|---------------------------|--|
| Voltage withstand: | 2 × highest nominal voltage for 10 ms |
| Power consumption: | 15 W nominal, 20 W maximum 20 VA nominal, 28 VA maximum |

ETHERNET (COPPER)

| | |
|-------------------|--|
| Modes: | 10/100 MB (auto-detect) |
| Connector: | RJ-45 |
| Protocol: | Modbus TCP/IP, DNP 3.0, IEC 60870-5-104, IEC 61850 |

ETHERNET (FIBER)

| | |
|------------------------------|--|
| Fiber type: | 100 MB Multi-mode |
| Wavelength: | 1300 nm |
| Connector: | MTRJ |
| Transmit power: | -20 dBm |
| Receiver sensitivity: | -31 dBm |
| Power budget: | 9 dB |
| Maximum input power: | -11.8 dBm |
| Typical distance: | 2 km (1.25 miles) |
| Duplex: | half/full |
| Protocol: | Modbus TCP/IP, DNP 3.0, IEC 60870-5-104, IEC 61850 GOOSE |

SERIAL

| | |
|--------------------------|--|
| RS485 port: | Opto-coupled |
| Baud rates: | up to 115 kbps |
| Response time: | 1 ms typical |
| Parity: | None, Odd, Even |
| Protocol: | Modbus RTU, DNP 3.0, IEC 60870-5-103, 1200 m (4000 ft) |
| Maximum distance: | |
| Isolation: | 2 kV |

USB

| | |
|--------------------------------|------------------------|
| Standard specification: | Compliant with USB 2.0 |
| Connector: | 115 kbps |

TYPE TESTS

| | | |
|---|---------------------------------|--|
| Dielectric voltage withstand: | | 2.3KV |
| Impulse voltage withstand: | EN60255-5 | 5KV |
| Damped Oscillatory: | IEC61000-4-18/IEC60255-22-1 | 2.5KV CM, 1KV DM |
| Electrostatic Discharge: | EN61000-4-2/IEC60255-22-2 | Level 4 |
| RF immunity: | EN61000-4-3/IEC60255-22-3 | Level 3 |
| Fast Transient Disturbance: | EN61000-4-4/IEC60255-22-4 | Class A and B |
| Surge Immunity: | EN61000-4-5/IEC60255-22-5 | Level 3 & 4 |
| Conducted RF Immunity: | EN61000-4-6/IEC60255-22-6 | Level 3 |
| Power Frequency Immunity: | EN61000-4-7/IEC60255-22-7 | Class A & B |
| Voltage interruption and Ripple DC: | IEC60255-11 | 15% ripple, 200ms interrupts Class A |
| Radiated & Conducted Emissions Sinusoidal Vibration: | CISPR11 / CISPR22 / IEC60255-25 | |
| Shock & Bump: | IEC60255-21-1 | Class 1 |
| Siesmic: | IEC60255-21-3 | Class 2 |
| Power magnetic Immunity: | IEC61000-4-8 | Level 5 |
| Pulse Magnetic Immunity: | IEC61000-4-9 | Level 4 |
| Damped Magnetic Immunity: | IEC61000-4-10 | Level 4 |
| Voltage Dip & interruption: | IEC61000-4-11 | 0, 40, 70, 80% dips, 250/300 cycle interrupts 2.5KV CM, 1KV DM |
| Damped Oscillatory: | IEC61000-4-12 | Level 4 |
| Conducted RF Immunity 0-150kHz: | IEC61000-4-16 | |
| Voltage Ripple: | IEC61000-4-17 | 15% ripple |
| Ingress Protection: | IEC60529 | IP40 front, IP10 Back -40C 16 hrs |
| Environmental (Cold): | IEC60068-2-1 | |
| Environmental (Dry heat): | IEC60068-2-2 | 85C 16hrs |
| Relative Humidity Cyclic: | IEC60068-2-30 | 6day variant 2 |
| EFT: | IEEE/ANSI C37.90.1 | 4KV, 2.5KHz |
| Damped Oscillatory: | IEEE/ANSI C37.90.1 | 2.5KV, 1Mhz |
| RF Immunity: | IEEE/ANSIC37.90.2 | 20V/m 80-1Ghz |
| ESD: | IEEE/ANSIC37.90.3 | 8KV CD/ 15KV AD |
| Safety: | UL508 | e83849 NKCR |
| | UL C22.2-14 | e83849 NKCR7 |
| | UL1053 | e83849 NKCR |

Technical Specifications (Continued)

| CERTIFICATION | | OPERATING ENVIRONMENT | | DIMENSIONS | |
|----------------|---|---|--|------------|-----------------------------|
| CE: | Low voltage directive EN60255-5 / EN60255-27 / EN61010-1 EMC Directive EN60255-26 / EN50263, EN61000-6-2, UL508 cULus UL1053, C22.2.No 14 | Ambient operating temperature: | -40°C to +60°C [-40°F to +140°F] | Size: | Refer to Dimensions Chapter |
| North America: | | Ambient storage / shipping temperature: | -40°C to +85°C [-40°F to +185°F] | Weight: | 4.1 kg [9.0 lb] |
| ISO: | Manufactured under a registered quality program ISO9001 | Humidity: | Operating up to 95% (non condensing) @ 55°C (As per IEC60068-2-30 Variant 2, 6days) 2000m (max) | | |
| | | Altitude: | II | | |
| | | Pollution degree: | III | | |
| | | Overvoltage category: | | | |
| | | Ingress Protection: | IP40 Front , IP10 back | | |

Ordering

| | 345 | E | ** | ** | ** | E | * | N | N | ** | D | * | Description |
|------------------------|-----|---|----|----|----|---|---|---|----|----|---|---|--|
| Base Unit | 345 | E | | | | | | | | | | | Base Unit |
| Language | | E | | | | | | | | | | | English |
| Phase Currents | | | P1 | | | | | | | | | | 1A three phase current inputs |
| | | | P5 | | | | | | | | | | 5A three phase current inputs |
| 345 Ground Currents* | | | | G1 | | | | | | | | | 1A ground current input |
| | | | | G5 | | | | | | | | | 5A ground current input |
| | | | | S1 | | | | | | | | | 1A sensitive ground current input |
| | | | | S5 | | | | | | | | | 5A sensitive ground current input |
| Power Supply | | | | | L | | | | | | | | 24 - 48 Vdc |
| | | | | | H | | | | | | | | 110 - 250 V dc/110 - 230 Vac |
| Faceplate | | | | | | E | | | | | | | Standard faceplate (LCD, full menu, actual values and setpoints) with 10 Inputs, 7 Outputs (2 Form A, 5 Form C) |
| 345 Current Protection | | | | | | | S | | | | | | Standard configuration - 87T, 87T-50, 51P(1), 51G(1), 50P(1), 50G(1), 51N(1), 50N(1) |
| | | | | | | | E | | | | | | Extended configuration - 87T, 87T-50, 51P(2), 51G(2), 50P(2), 50G(2), 51N(2), 50(2), 50BF(1), RGF(1), 49P |
| | | | | | | | M | | | | | | Advanced configuration - 87T, 87T-50, 51P(2), 51G(2), 50P(2), 50G(2), 50BF(2), 49P, 51N(2), 50N(2), 51_2 (2), RGF(2) |
| Communications | | | | | | | | | SN | | | | Standard :Front USB, Rear RS485 : Modbus RTU, DNP3.0, IEC60870-5-103 |
| | | | | | | | | | 1E | | | | Standard + Ethernet (Copper & Fiber - MTRJ) MODBUS TCP/IP, DNP3.0, IEC 60870-5-104 |
| | | | | | | | | | 2E | | | | Standard + Ethernet (Copper & Fiber - MTRJ) MODBUS TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850 GOOSE |
| | | | | | | | | | 3E | | | | Standard + Ethernet (Copper & Fiber - MTRJ) MODBUS TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850 |
| Case Design | | | | | | | | | | | D | | Draw-out design |
| Harsh Environment | | | | | | | | | | | | N | None |
| | | | | | | | | | | | | H | Harsh Environment Conformal Coating |

Ordering Notes:

* 1) G1/G5 and S1/S5 must match corresponding P1/P5 - there cannot be 5A and 1A mixing

Accessories for the 345

- | | |
|----------------------------------|----------------------------|
| • Multilink Ethernet Switch | ML2400-F-HI-HI-A2-A2-A6-G1 |
| • Viewpoint Engineer | VPE-1 |
| • Viewpoint Maintenance | VPM-1 |
| • Viewpoint Monitoring IEC 61850 | VP-1-61850 |

Visit www.GEMultilin.com/345 to:



- View Guideform specifications
- Download the instruction manual
- Review applications notes and support documents
- Buy a 345 online
- View the 3 Series Family brochure