



REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1



APPLICATION:

Metering.

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts, 10 kV BIL full wave.

**CONTINUOUS THERMAL
CURRENT RATING FACTOR:**

1.33 at 30°C. amb., 1.0 at 55°C. amb.

Terminals are brass studs No. 10-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 3.5 lbs.


4

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60HZ			SECONDARY WINDING RESISTANCE (OHMS @ 75°C)
		BO.1	BO.2	BO.5	
576-102	1000:5	0.3	0.3	0.6	0.179
576-122	1200:5	0.3	0.3	0.6	0.215
576-152	1500:5	0.3	0.3	0.6	0.173
576-162	1600:5	0.3	0.3	0.6	0.217
576-202	2000:5	0.3	0.3	0.3	0.272
576-252	2500:5	0.3	0.3	0.3	0.339
576-302	3000:5	0.3	0.3	0.3	0.468
* 576-402	4000:5	0.3	0.3	0.3	0.945
* * 576-502	5000:5	0.3	0.3	0.3	1.462
* * 576-602	6000:5	0.3	0.3	0.3	2.168


* Rating Factor 0.62 at 30°C.

** Rating Factor 0.55 at 30°C.

Model 576

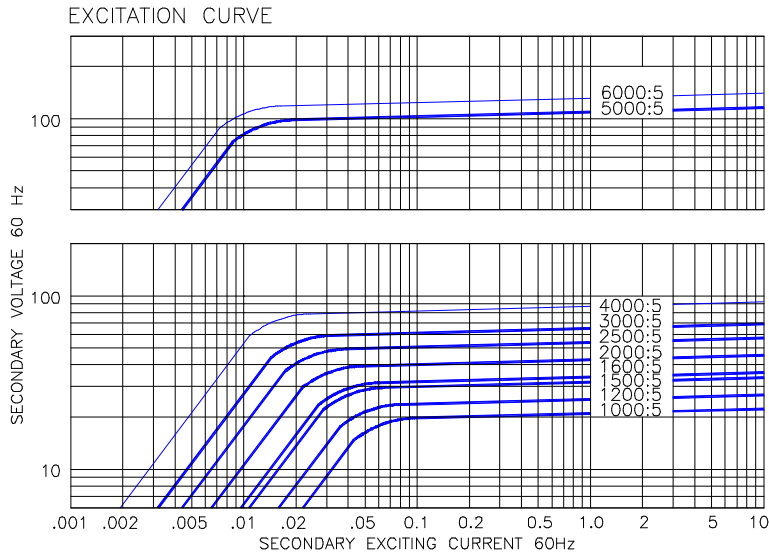

4

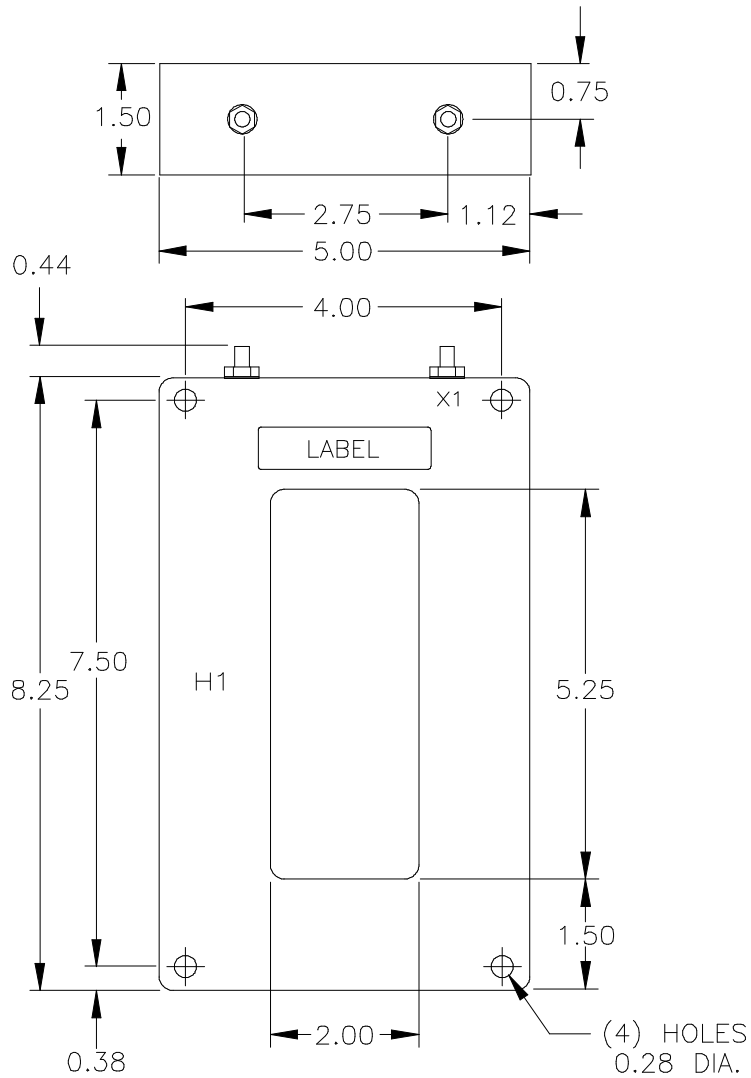

USA, Canada, Asia, Latin America

Tel: +1-800-547-8629

Fax: +1-905-201-2455

e-mail: sales.multilin@ge.com

Europe, Middle East, Africa

Tel: +34-94-485-88-00

Fax: +34-94-485-88-45

e-mail: gmultilin.euro@ge.com